

# Threat Intelligence

- [\[Backup\] How Did I Take Over CobaltStrike Servers](#)
- [Use Searching Engines to Hunt For Threat Actors](#)

# [Backup] How Did I Take Over CobaltStrike Servers

Hi folks, today I would like to share how I take over some Cobalt Strike TeamServers with Quake and Password Spray Attack. From the perspective of a threat hunter, it is good to track C2 servers on the Internet. From the perspective of a hacker, it is good to compromise a host, but it is better to compromise a C2 team server and then take over all compromised hosts connected to the team server : D

## Recon

Before exploitation, we need to recon. Here I use Quake(<https://quake.360.net>) to find a list of Cobalt Strike with weak credentials. Quake is something which is similar to Shodan. The query sentence should be **response:"\x00\x00\xca\xfe" AND port: "50050"**

What does it mean? Quake will try some very simple passwords to connect to Cobalt Strike Team Server. If the authentication is successful, Cobalt Strike Team Server will return "\x00\x00\xca\xfe" in response. According to search results, there are 417 records, 191 unique IPs currently. Of course, if you do not specify the default port, you could get more results. To get complete and detailed information, a subscription of Quake is recommended.

Image not found or type unknown



After getting these results, then export IP of these Team Servers as a file. So, let's use Password Spray Attack against these Team Servers!

## Exploitation

**Just a disclaimer, it is unethical and even illegal to actually take over those Team Servers. The article is just a proof of concept, it does not encourage anyone to pwn those servers, even they may belong to unethical hackers.**


Because Cobalt Strike Team Server has rate limit, it is not wise to brute force a single Team Server with a big password list. Instead, we can use spray a single simple password to a list of Team Servers.

I download and modify a script from <https://github.com/ryanohoro/csbruter> to enable it to launch Password Spray Attack.

Image not found or type unknown




Image not found or type unknown

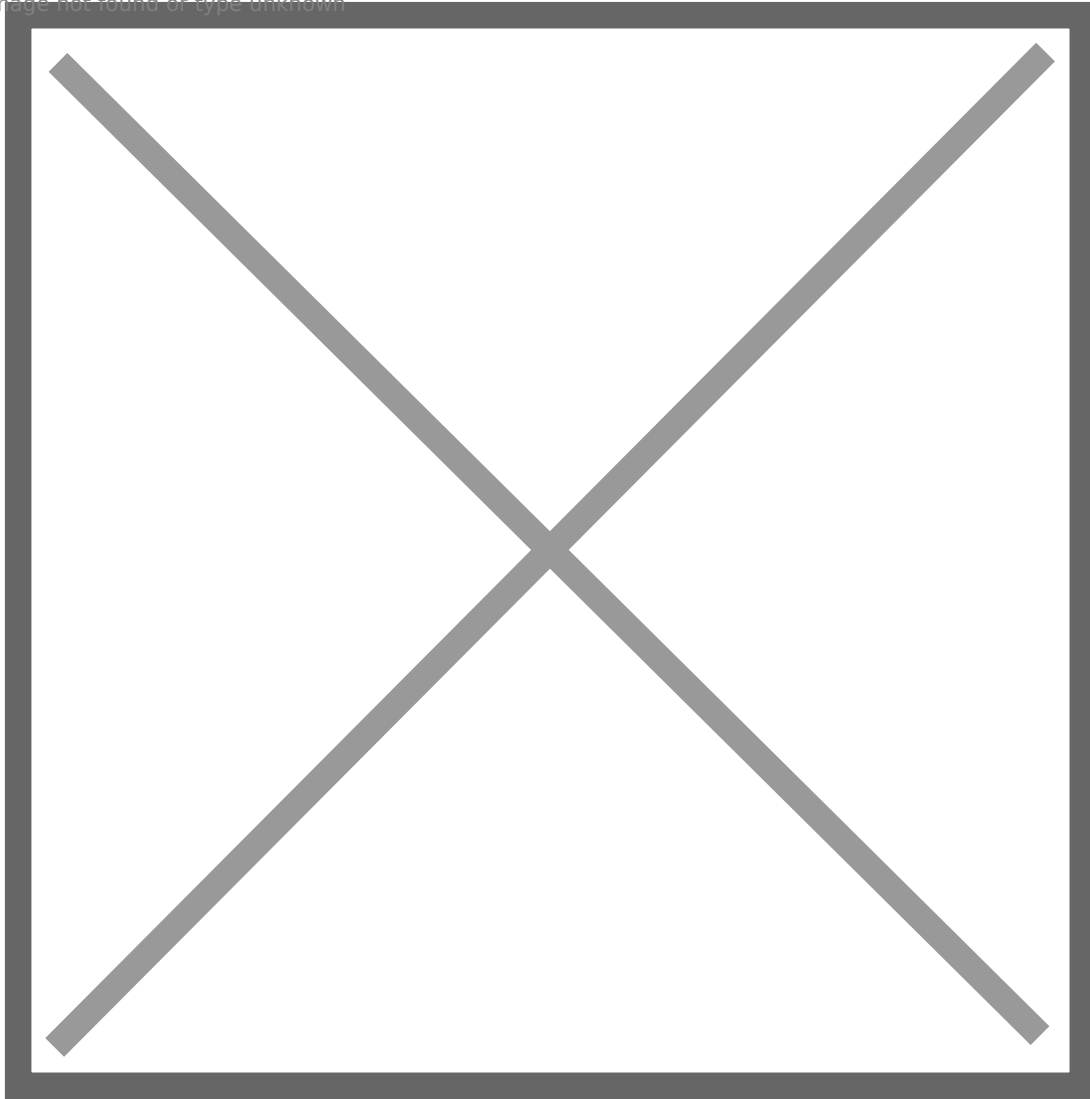

Oh, among these 158 Team Servers, 24 of them use the same simple password! Just select one and try to log in!

Image not found or type unknown

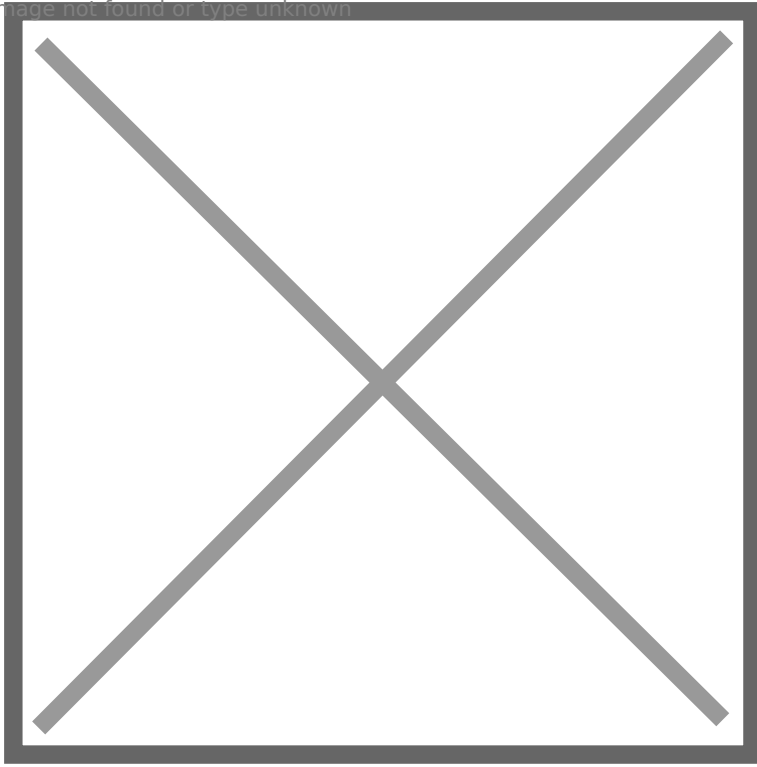

Oh no! The version of your client should match target Team Server's! Actually most of these Team Servers' version are 4.0 lol.

Try another one, cool, there are a lot of bots controlled by the Team Server! By this way we are able to successfully find and take over some Cobalt Strike Team Servers!

Image not found or type unknown



### **Tips**

The list I used is absolutely not an exhaustive list of Team Server with a weak password. If you want to find more Team Servers with a weak password, here are some tips

- 1: Remove the specified port and modify the script.
- 2: If a Team Server does not show up in previous search results, it does not mean the Team Server has a strong password, since Quake will only try some simplest passwords like 123123, 123456, password, etc.
- 3: Just try different fingerprinting methods to get a large list of Cobalt Strike Team Servers, and then spray a single simple password to them. If you are lucky, you will take over many Team Servers from the list : P

Thanks for reading! Happy hacking!

# Use Searching Engines to Hunt For Threat Actors

## Background

Hi folks, today, I'd like to discuss how to leverage search engines to identify vulnerable servers used by threat actors. These actors often employ multiple servers for various purposes, such as phishing infrastructure, command and control (C2) infrastructure, and tool/payload servers. Due to poor operational security (OPSEC) or budget constraints, some may even use a single server for multiple functions.

People make mistakes, including threat actors. While they may employ advanced C2 frameworks, custom C2 profiles, redirectors, legitimate domains and certificates, and evasive tradecraft, a single mistake, such as an open directory misconfiguration, can undermine their entire effort.

As I am not a threat-hunting expert, my approach to identifying threat actors' infrastructure may not be exhaustive. However, in this article, I will demonstrate how to use the search engine Quake (<https://quake.360.net/>) to locate these misconfigured (Open Directory) infrastructures and provide an analysis of one specific case.

## Motivation

As a red team operator, I fully understand the importance of OPSEC. Although I am not a threat-hunting expert, utilizing threat intelligence to track and locate other hackers and observing their mistakes can help enhance my own OPSEC awareness, allowing me to avoid low-level mistakes. Moreover, whether we are red team or blue team operators, our common goal is to make cyberspace safer.


Threat actors who engage in malicious cyber activities should not have a foothold in cyberspace. While we may not possess law enforcement authority, we can at least expose their activities and warn others about their danger and existence.

The threat intelligence community boasts numerous outstanding threat hunters, such as Michael Koczwara, whose articles have provided me with significant insights. These threat hunters expose threat actors' infrastructure IPs and domain names, assisting in enriching blacklists for both



individuals and cybersecurity products. This article (<https://bank-security.medium.com/hunting-cobalt-strike-servers-385c5bedda7b>) explains how to use different methods, such as default Cobalt Strike certificates and default 404 responses, to search for Cobalt Strike servers on the internet using the Shodan search engine. Other articles, like <https://michaelkoczvara.medium.com/hunting-c2-with-shodan-223ca250d06f>, analyze the characteristics of C2 servers beyond Cobalt Strike and how to locate them using search engines.

Image not found or type unknown

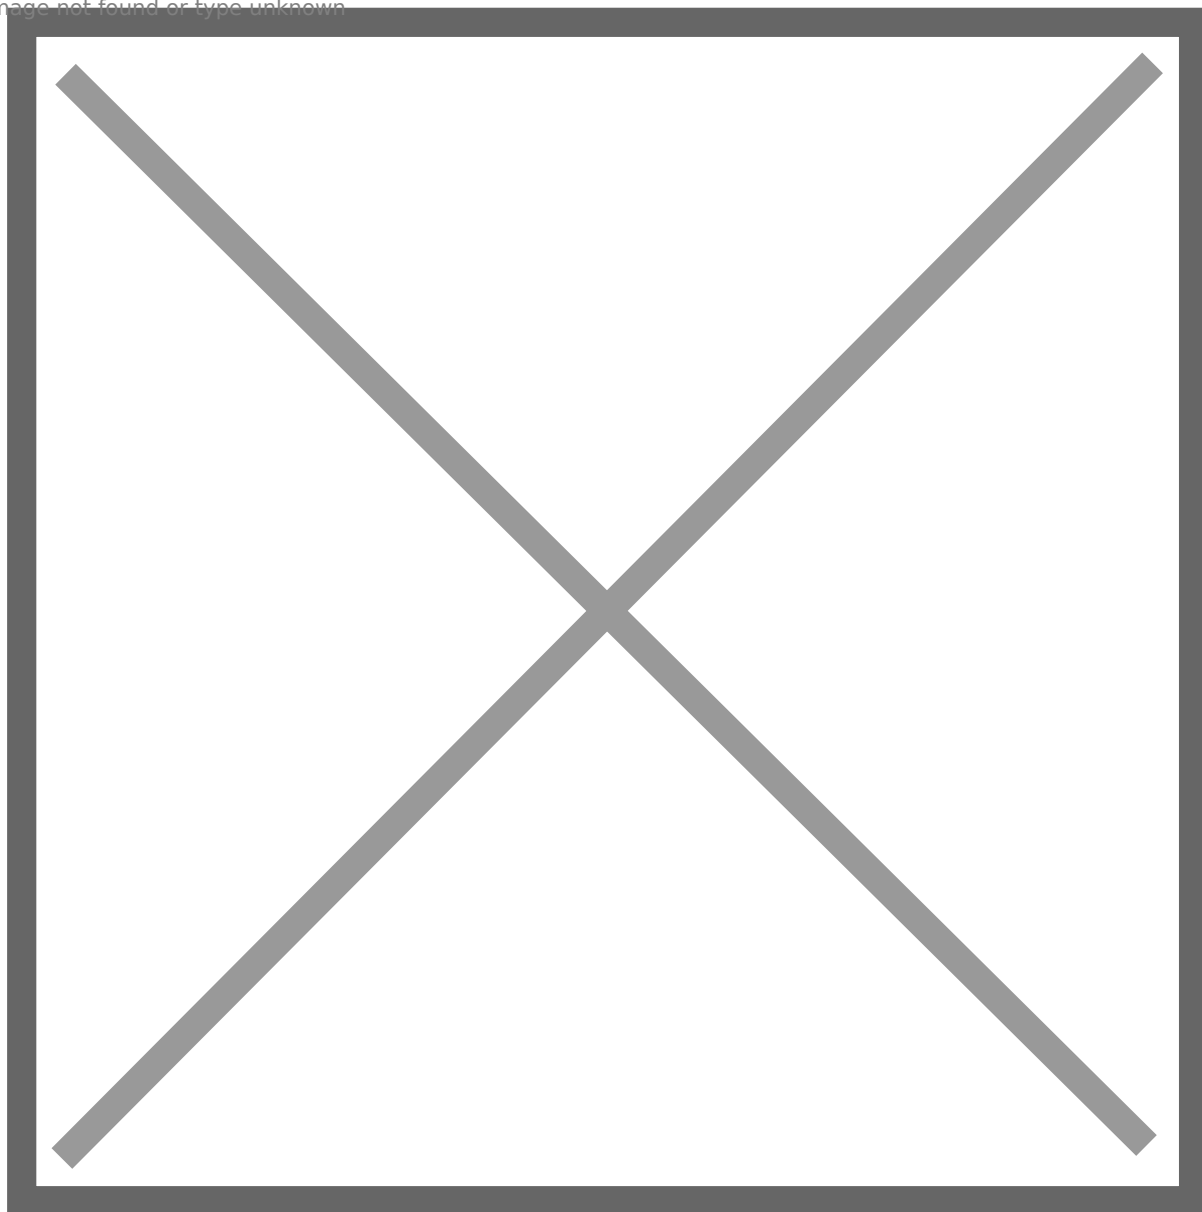

Building on this foundation, we can compile a list of threat actor servers and feed it to security products, automating the isolation of communication with these malicious servers and alerting people to their existence. However, since most of us do not have law enforcement powers, our ability to take further action is limited. That said, if threat actors make low-level mistakes like open directory, we can counter them more effectively, for example, by gathering more comprehensive evidence, analyzing malicious file samples, and potentially identifying the threat actors based on the downloadable files.

Image not found or type unknown



# Searching Engine Stuff

There is a wide variety of internet asset search engines available, such as Shodan, Censys, Zoomeye, and Fofa. However, when it comes to locating threat actor servers with open directory configurations, my personal choice is the Quake search engine. Quake's syntax supports keyword searches based on HTTP titles and responses. For sites with open directory configurations, the webpage title is typically "**Directory listing for /**" or "**Index of /**". The open directory page title is primarily determined by the web server in use. For instance, if it's an Apache2 server, the title would be "Index of /", and if it's a Python HTTP server, the title would be "Directory listing for /".

Image not found or type unknown

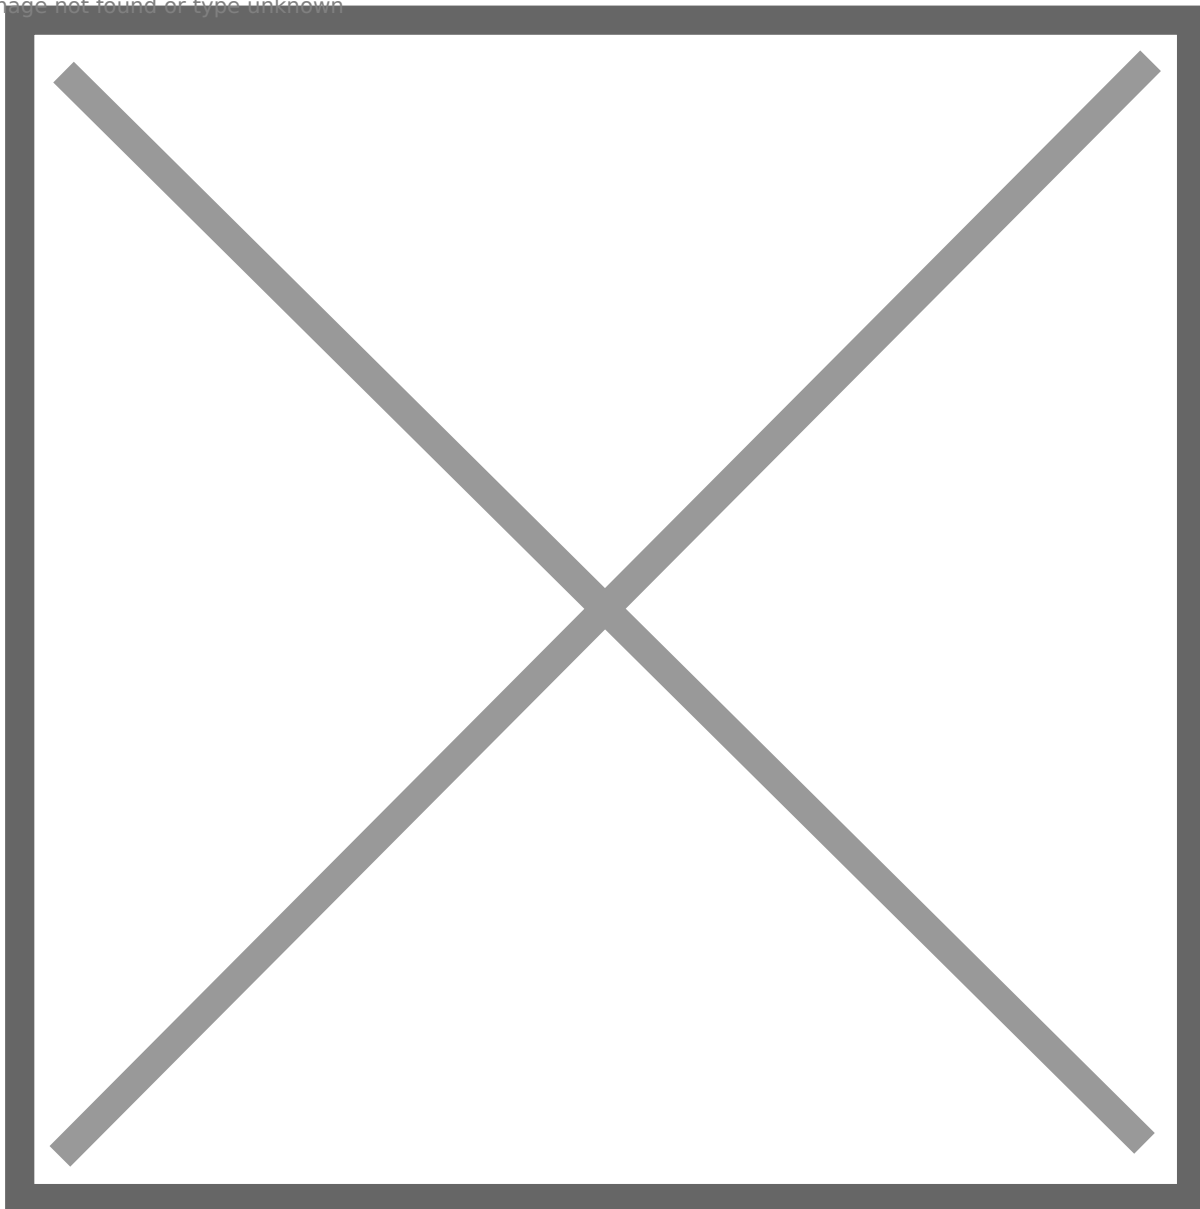


Image not found or type unknown



Threat actors tend to prefer setting up temporary HTTP file servers using **Python** due to its simplicity and convenience. However, sometimes they forget to shut down the Python HTTP server promptly, leaving traces we can track. Filtering by HTTP response is relatively straightforward; we can enter the name of any security tool or malware, such as Mimikatz, Cobalt Strike, or Rubeus.

Some query examples:

**title: "Directory listing for /" and response:"cobaltstrike"**

Based on the provided screenshot, we can see that 67 servers are currently or have previously host the Cobalt Strike C2 framework tool for threat actors to download. I speculate that the majority of these Cobalt Strike instances are likely to be unauthorized copies.

Image not found or type unknown



**title: "Directory listing for /" and response:"mimikatz"**

49 servers are currently or have previously host the hack tool mimikatz for threat actors to download.

Image not found or type unknown




**title: "Directory listing for /" and response:"exp"**

We use this query to search servers that are currently or have previously host vulnerability exploits.

Take a close look at this server, from the preview, we can see a .ovpn file. It could be used to connect to the threat actor's internal network (Or it is a victim's .ovpn file). Unfortunately, the threat actor already shut down the Python HTTP server by the time I found it.


Image not found or type unknown

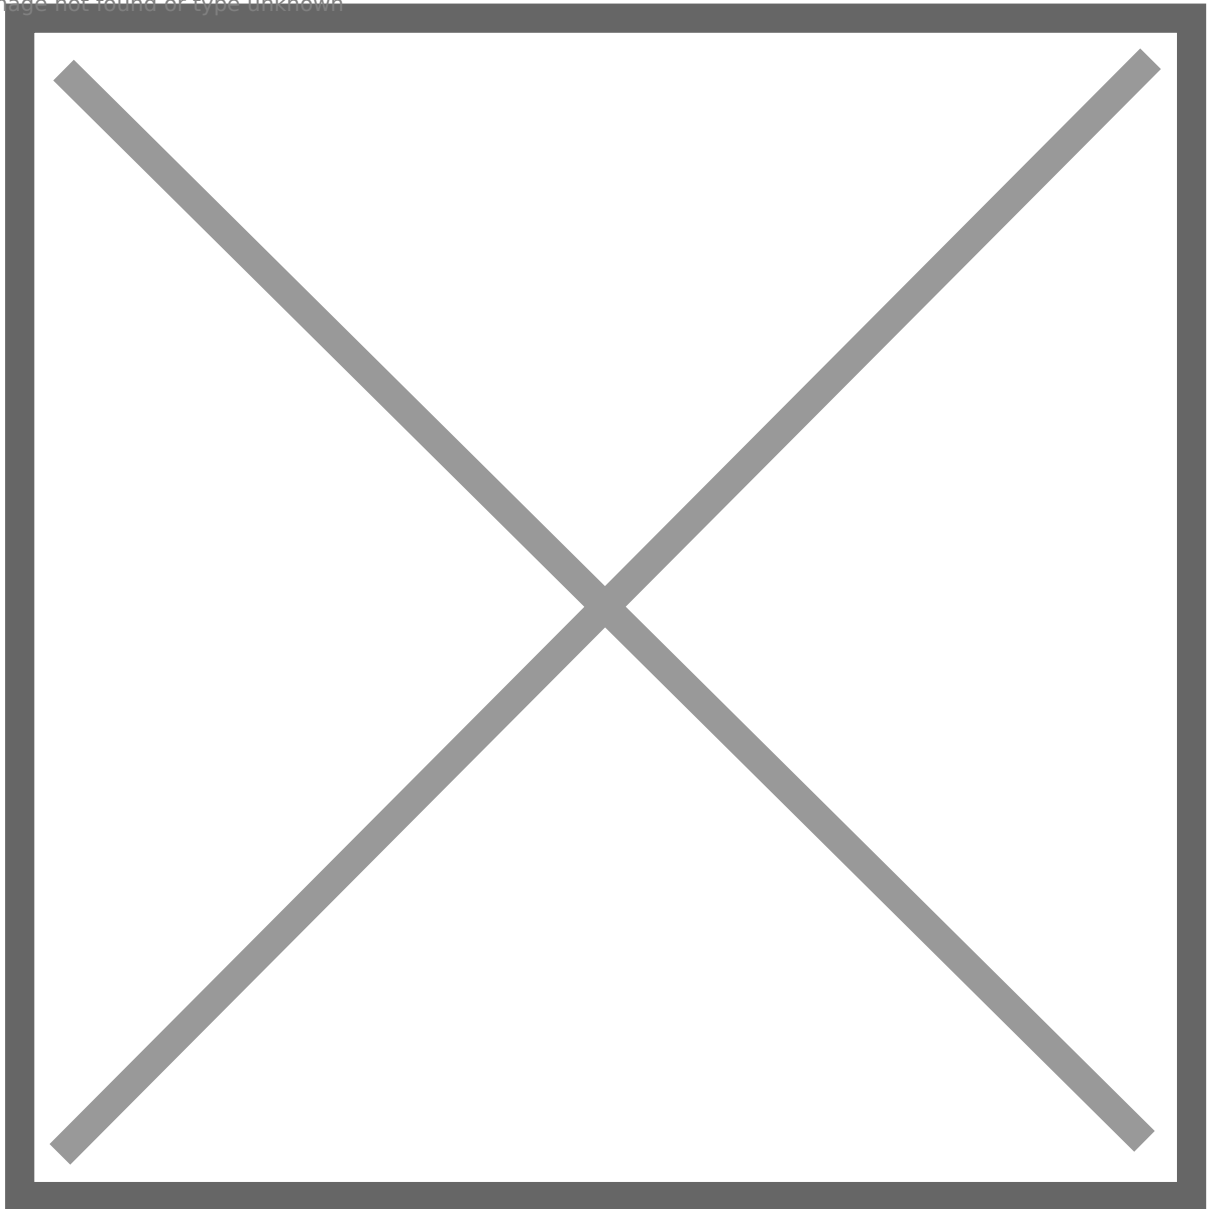

**title: "Directory listing for /" and response:"lsass"**

We can use this query to search servers that are currently or have previously host lsass dump. We can see server **80.85.156.184** was used by a threat actor to save lsass dump file.

Image not found or type unknown

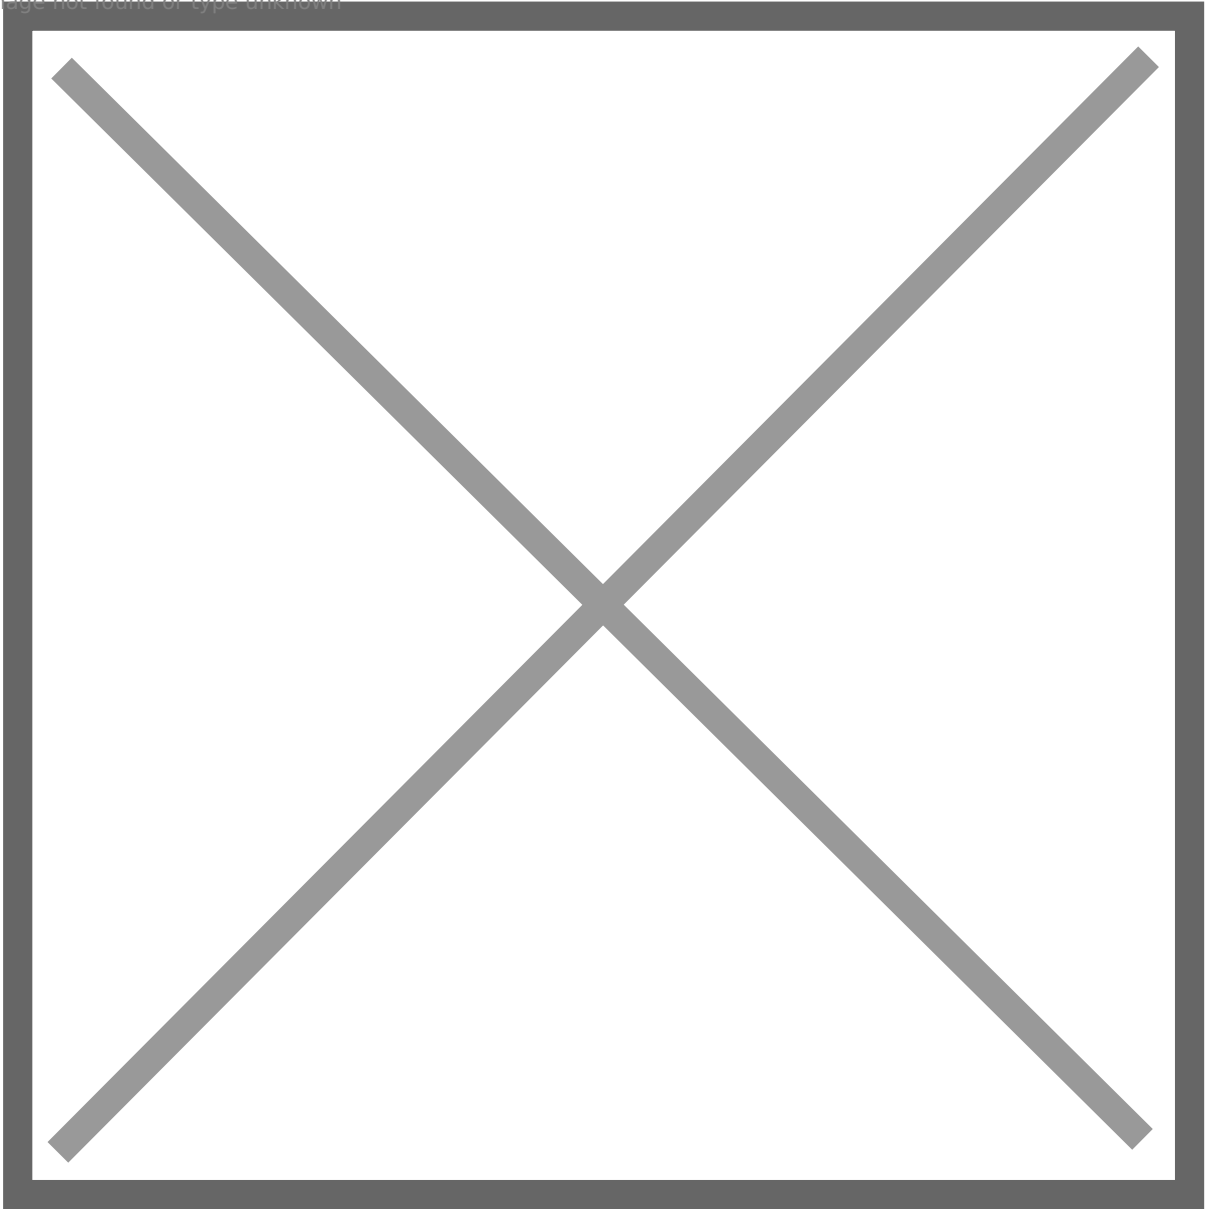

Currently, this server is not accessible, some other threat hunters already noticed this server before.



Image not found or type unknown



In conclusion, we can flexibly adjust the HTTP response keywords for endless search possibilities. However, the ultimate goal remains the same: to locate threat actors' hacking tools, malware, vulnerability exploits, and "spoils" obtained from their victims. If we happen to find their personal files, like an .ssh private key, a .ovpn file, document-based files, their bad day go to worse day : D

## Case Analysis


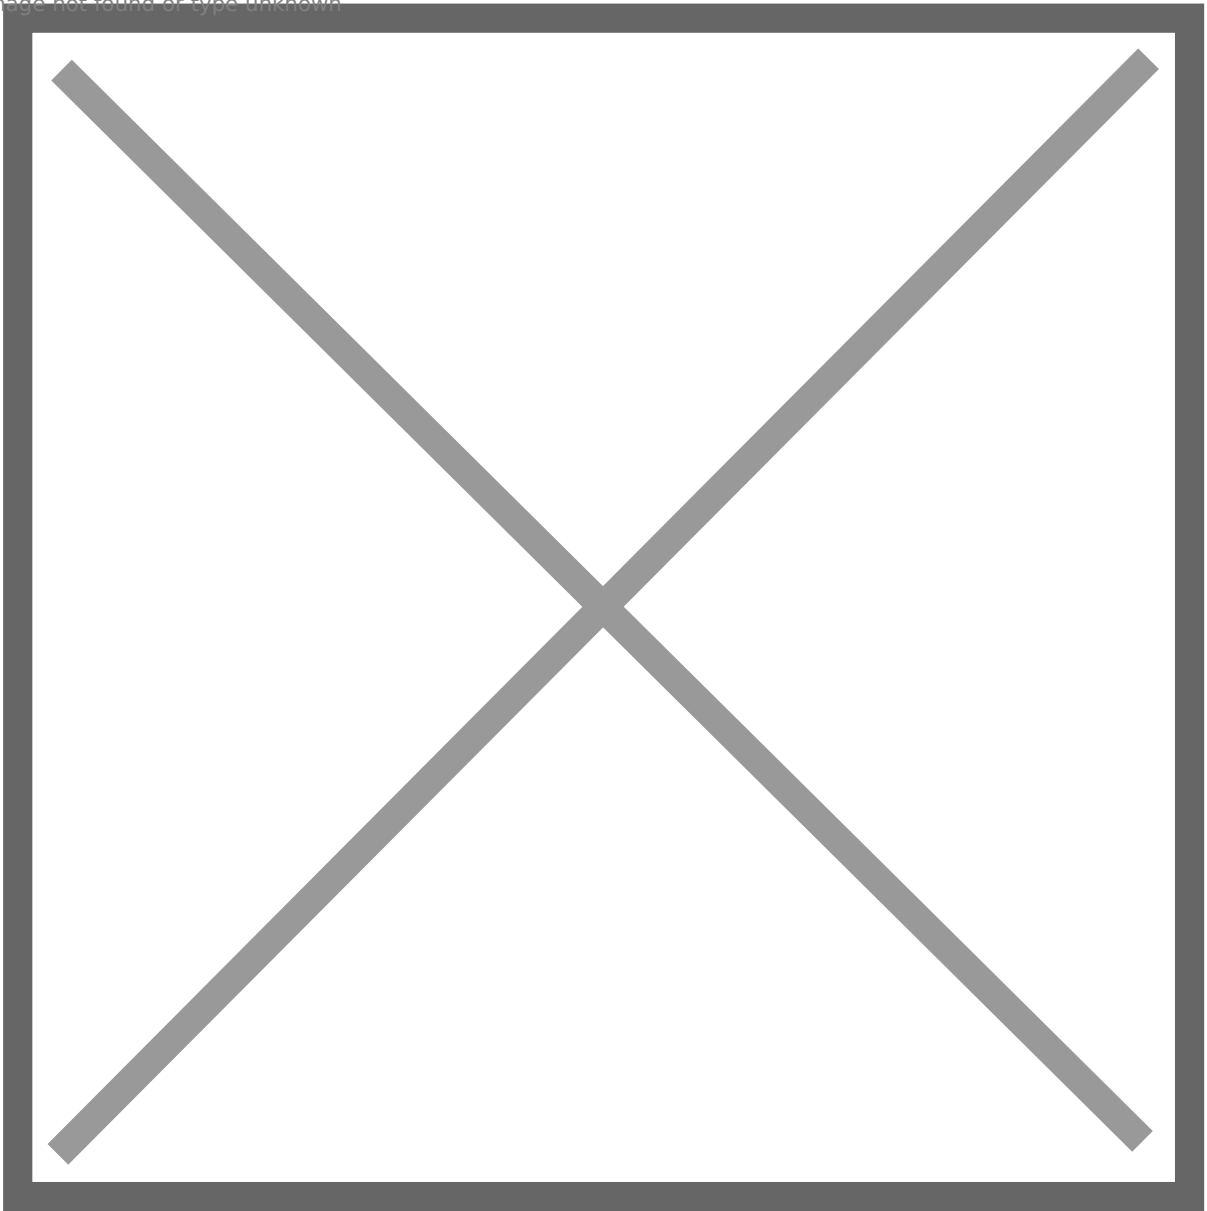
Among the improperly configured servers discovered, I would like to share one of the most interesting examples (<http://81.68.227.204:8000/>). If this server is not a honeypot, then this hacker certainly has **zero OPSEC**. Upon visiting this URL, it becomes evident that the hacker is running a Python HTTP server at the root directory of their C drive, as we can see directories such as Windows, Users, and Program Files. We can easily find some hack tools, such as CS4.4 K8 (Downloaded from <https://github.com/k8gege/Aggressor/releases/tag/cs>),  (scanner).

Image not found or type unknown



This hacker seems to have a romantic side, as there is a folder named 'love' in the C drive root directory, which contains a web animation as shown in the picture. It appears to be a small surprise prepared for his girlfriend, and from this, we can know her name. However, it's worth noting that this information could also be fabricated.

Image not found or type unknown




The hacker installed multiple programs, such as Redis, Python, GO language, Metasploit, QQ, etc.  
And this HTTP server was run as Administrator

Image not found or type unknown




We can see his Cobalt Strike team server's log:

Image not found or type unknown

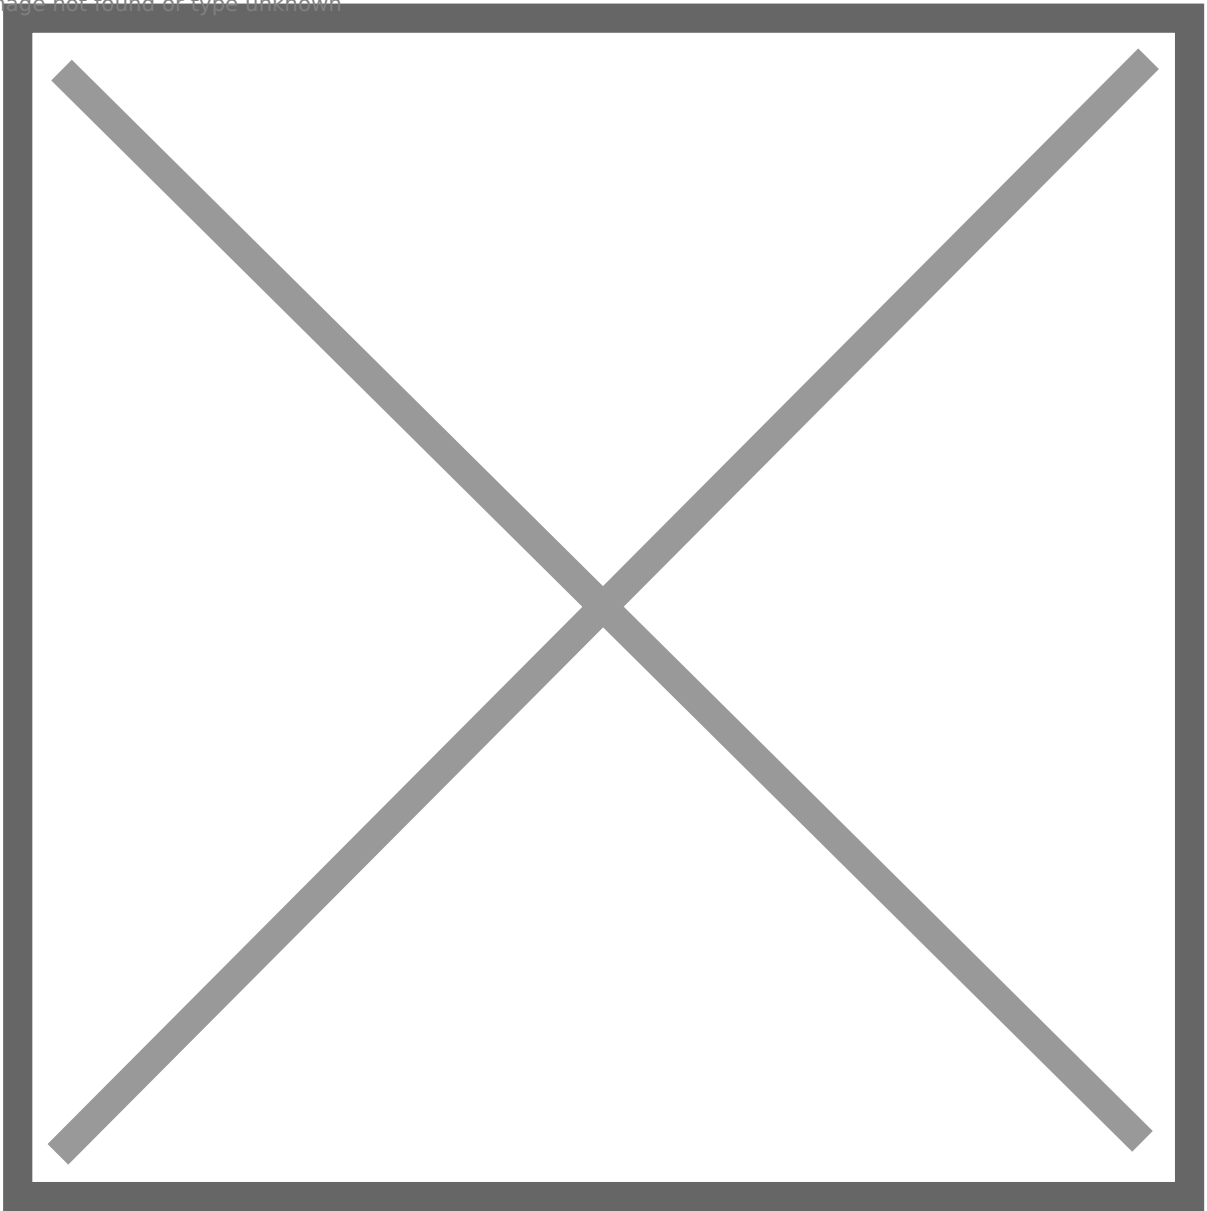

The hacker used some insecure commands like shell whoami, sleep 0.

Image not found or type unknown

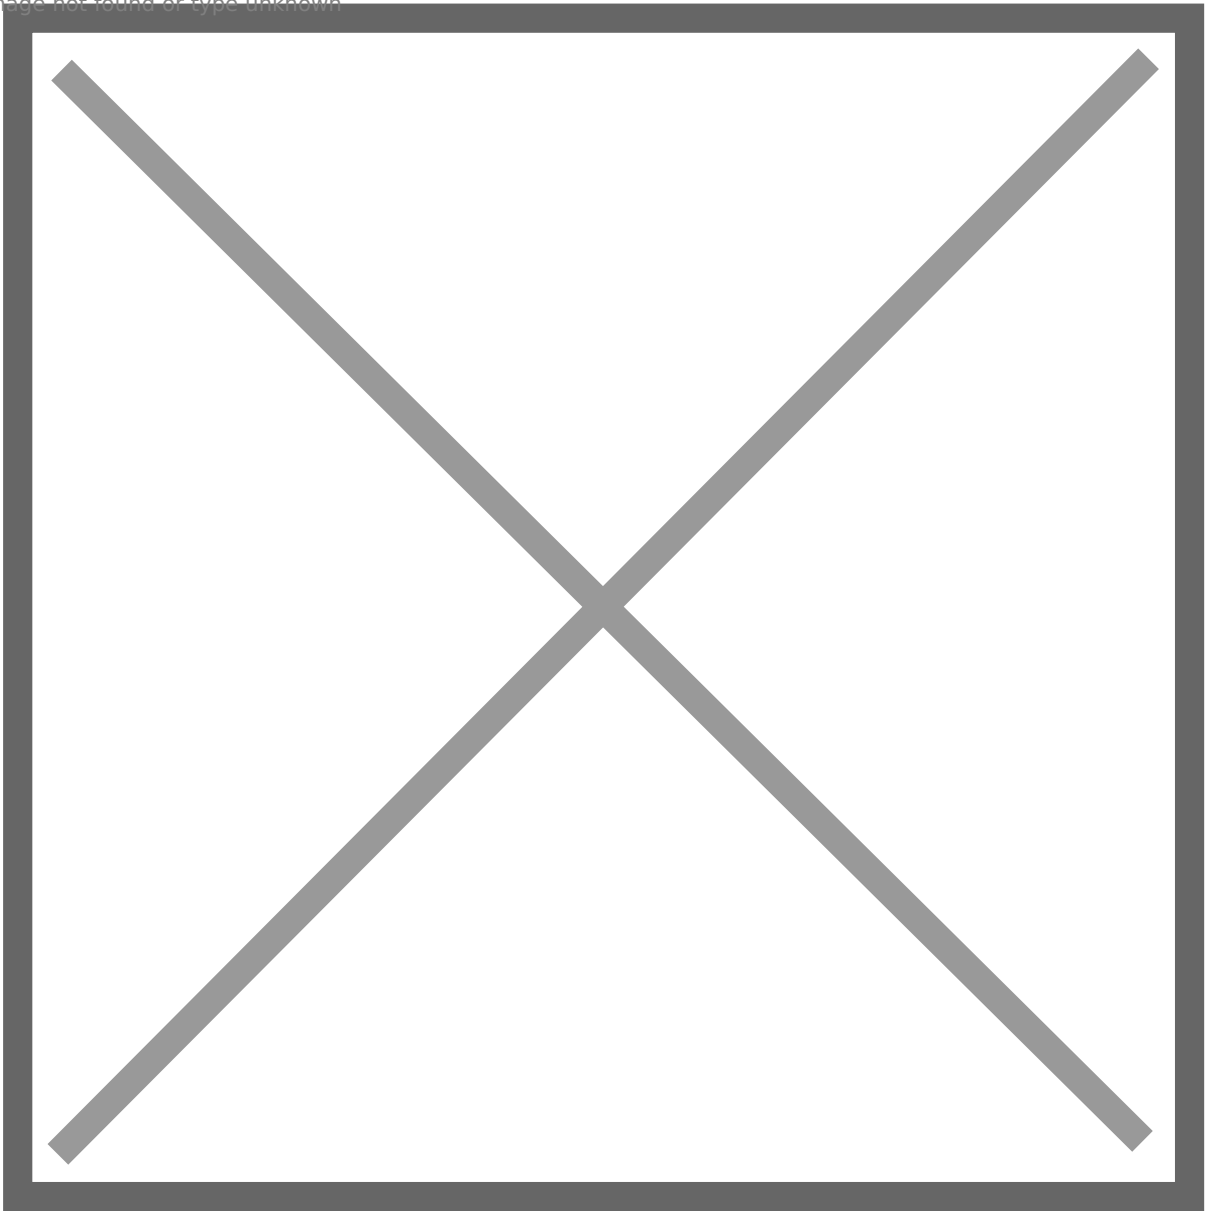

The hacker enabled **stager**, and we can see some victims he controlled.

Image not found or type unknown


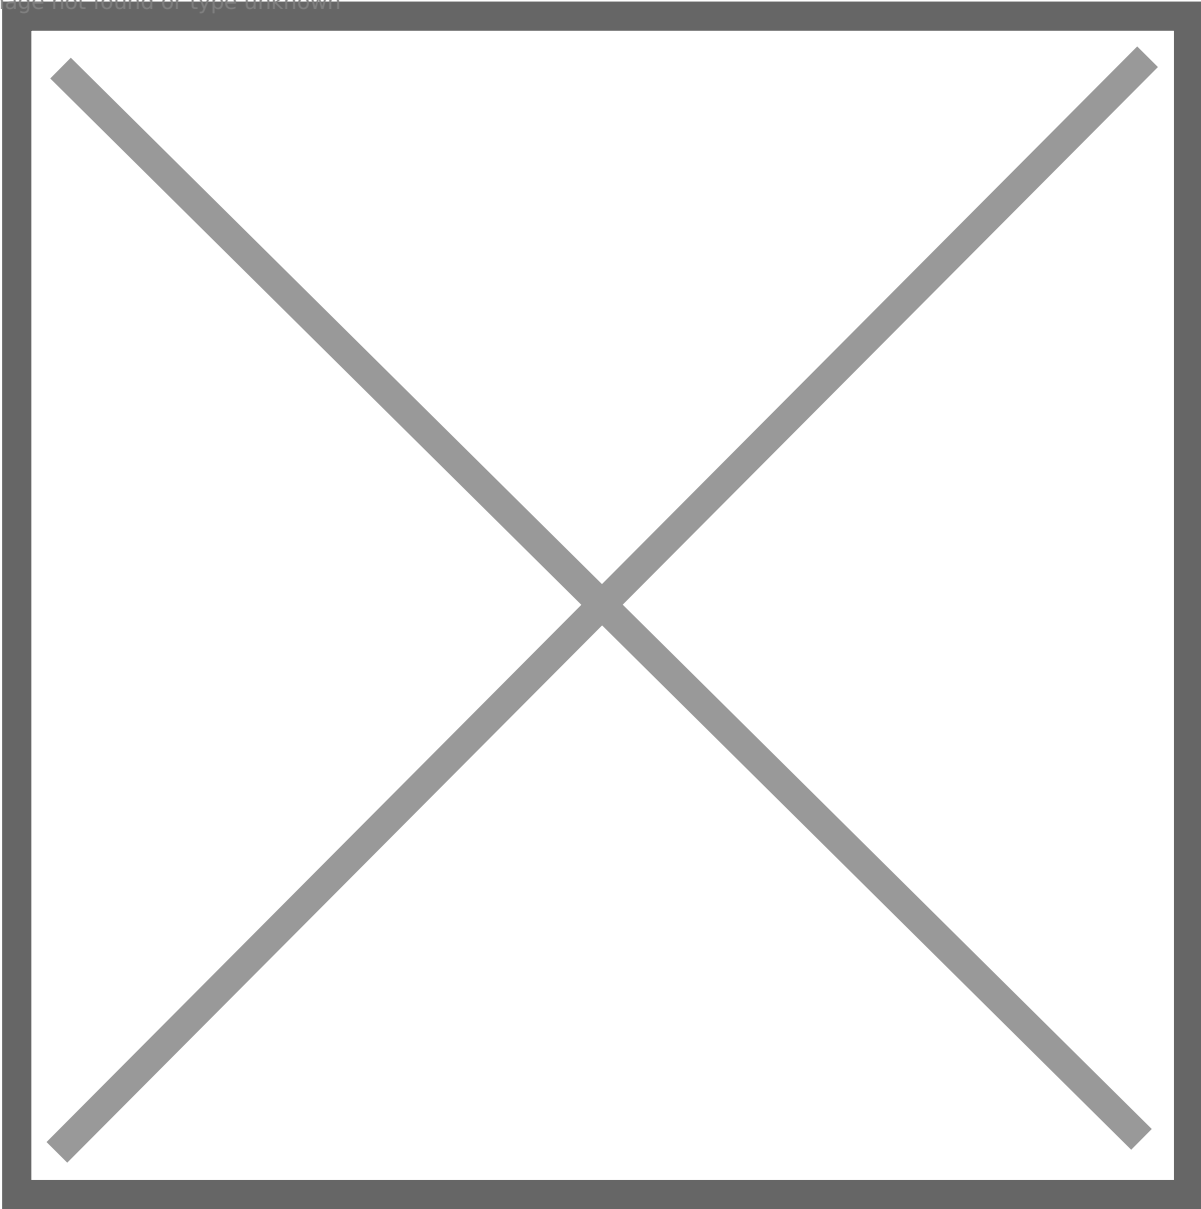


Image not found or type unknown

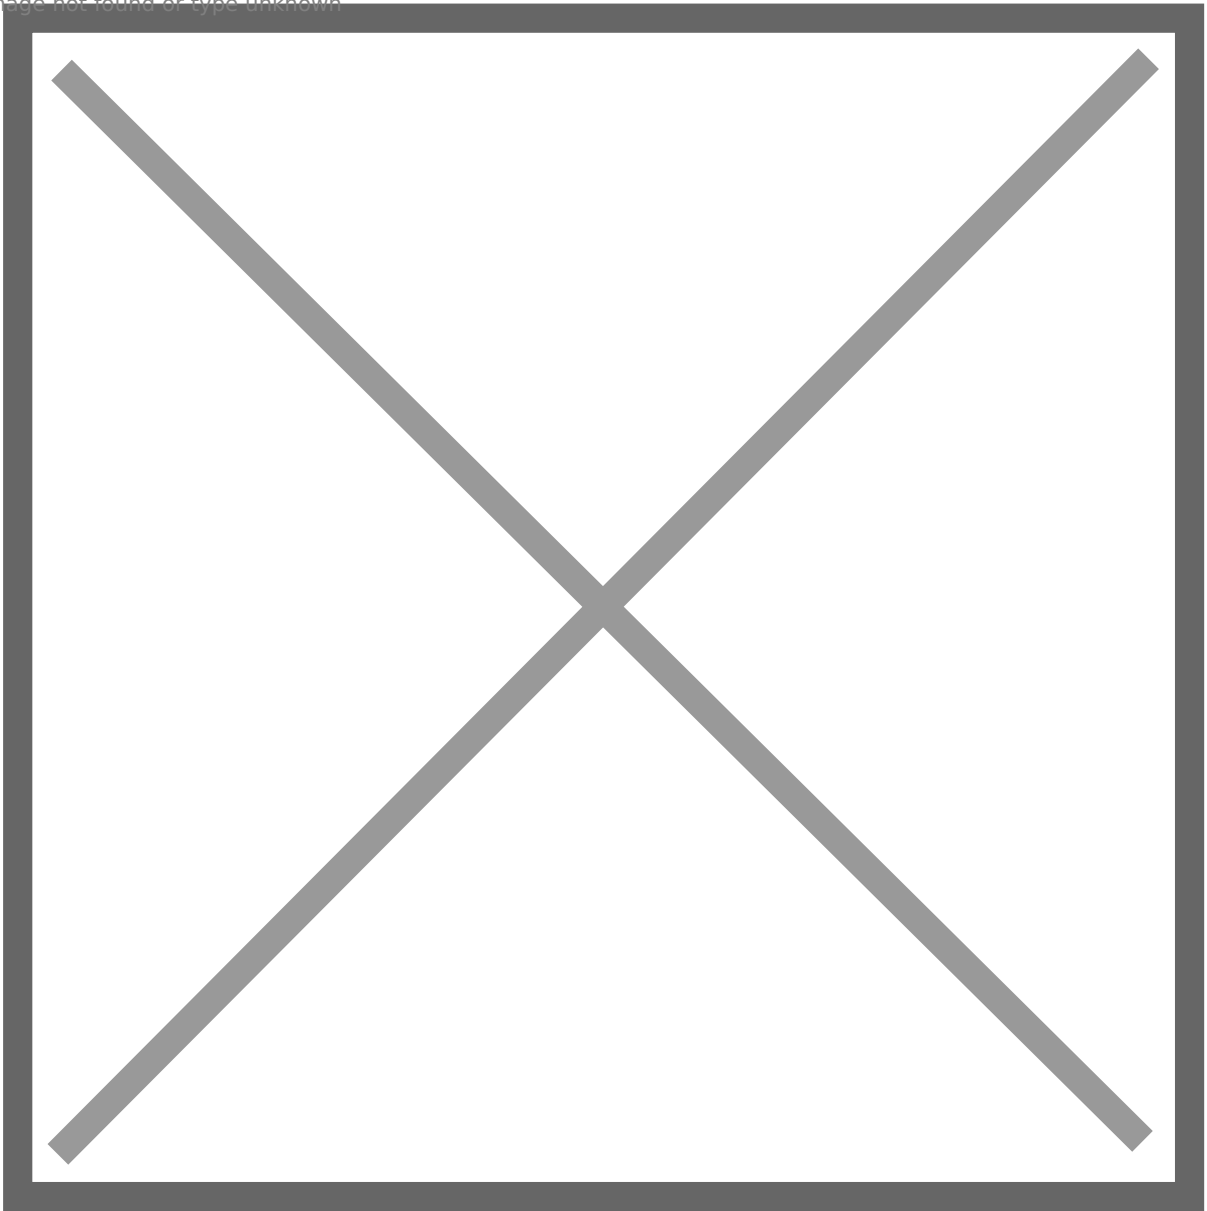

The hacker also uses this server as a challenge box by setting up a local lab.



Image not found or type unknown


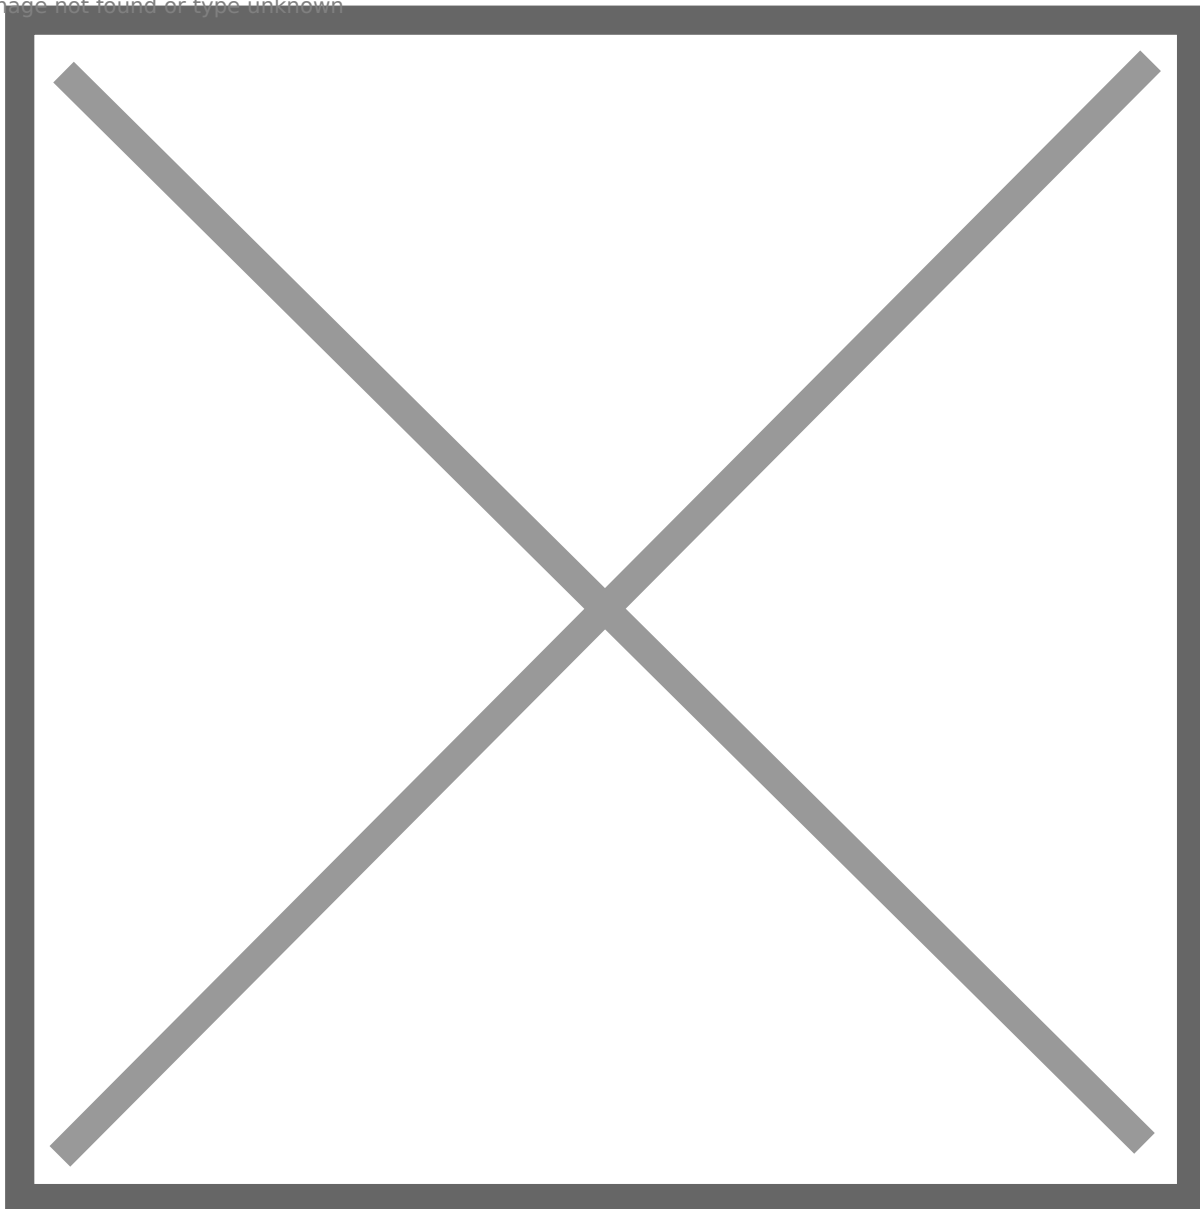


Image not found or type unknown



The hacker deleted some other user accounts and their directories. The SID ends with 500, so it is a local administrator account. Maybe the account was created by other hackers?

Image not found or type unknown

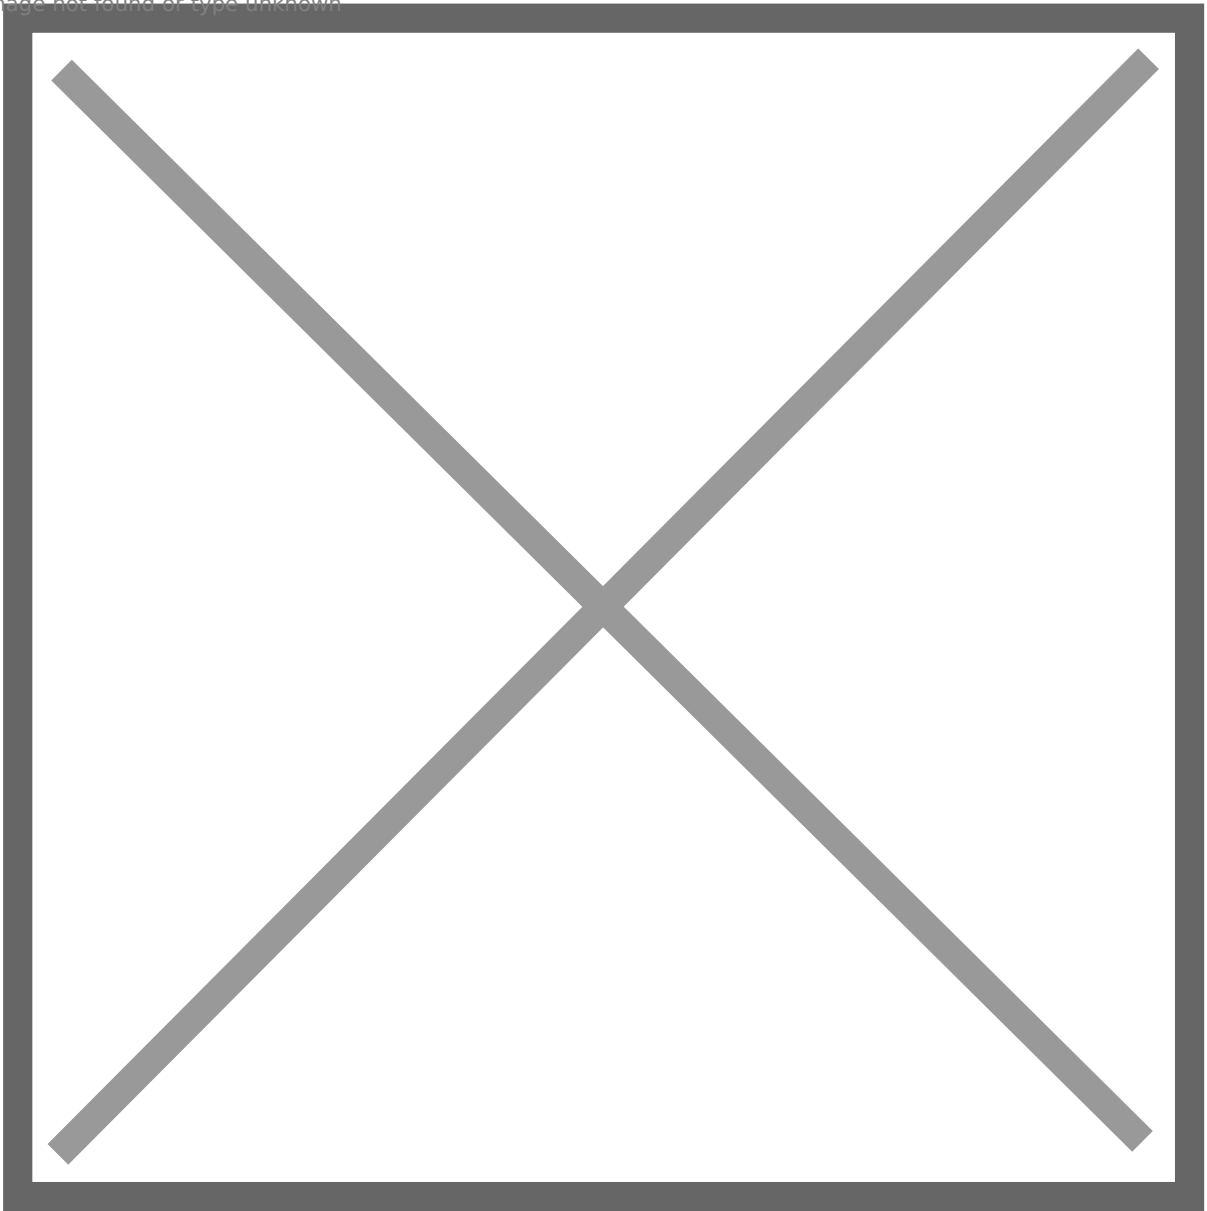

From **ToDesk config file**, I found this hacker's phone number, and I found his social media account, should I add him and say hello? : D

Image not found or type unknown



Image not found or type unknown


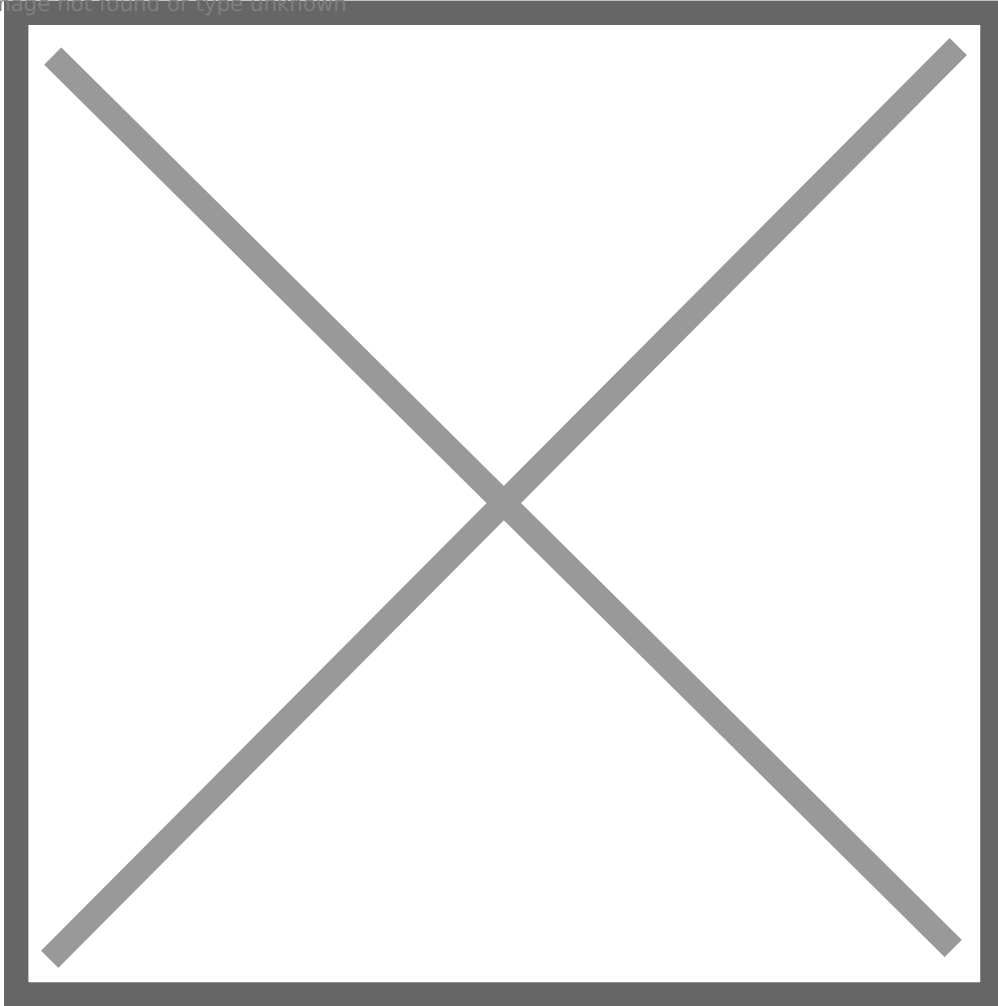


Image not found or type unknown

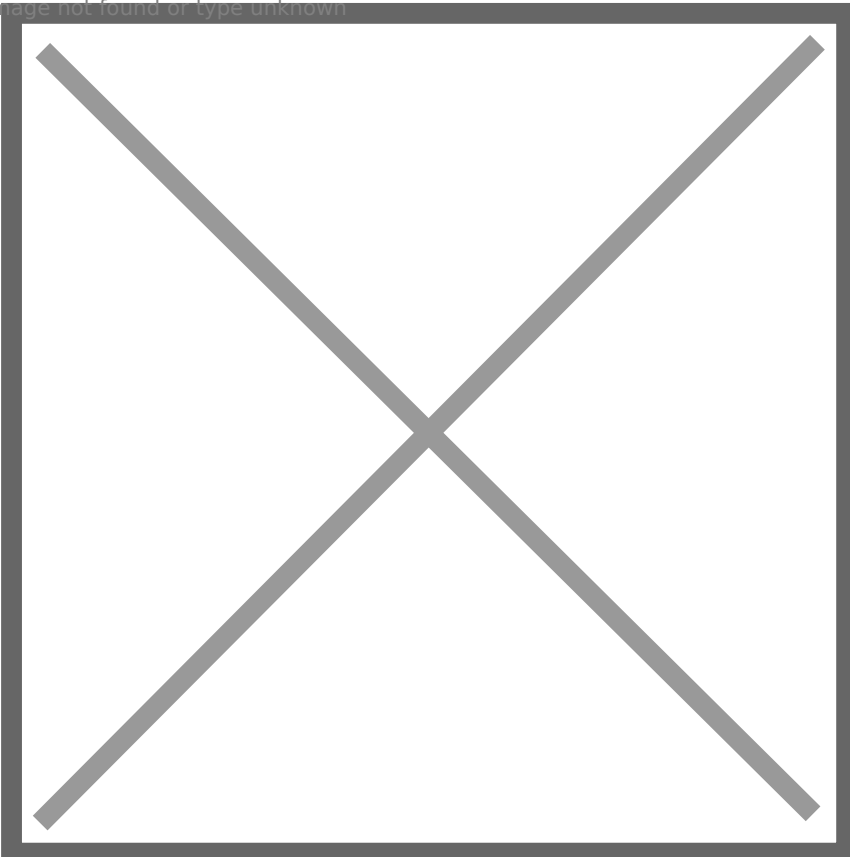

Alright, considering we have access to the entire C drive, on the surface, we are examining this open directory, but in reality, what we are doing is almost akin to local reconnaissance. Let's directly jump to an issue that could lead to this hacker's server being compromised.

The server is running IIS server, and we can access IIS directory. We find a file `aspx.aspx`, it is basically a one-liner webshell.

Image not found or type unknown

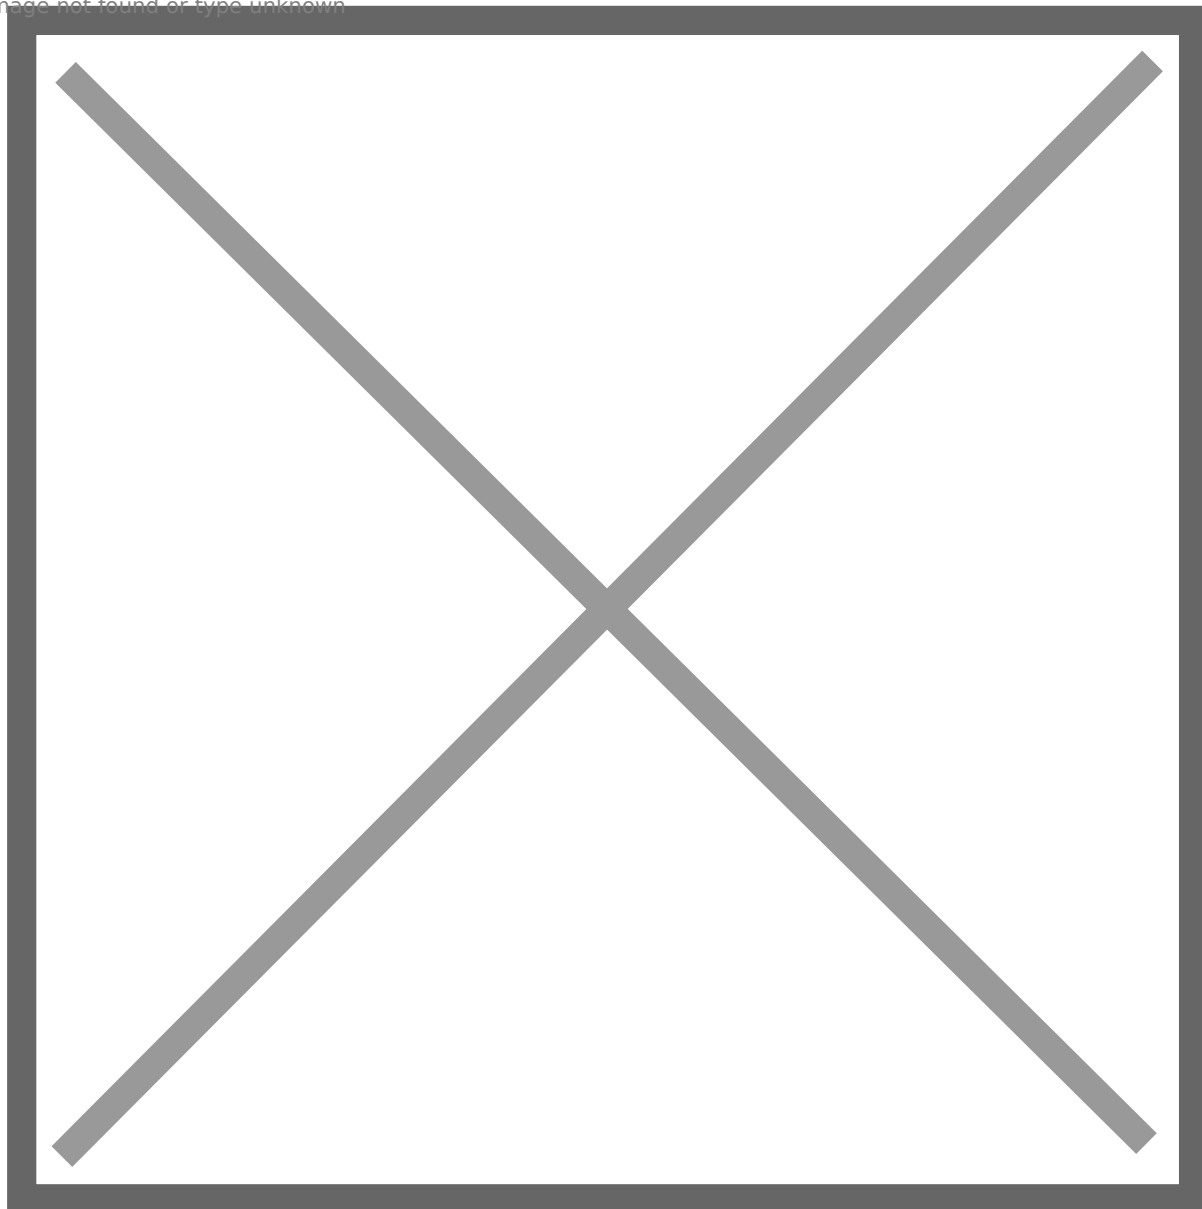


Image not found or type unknown

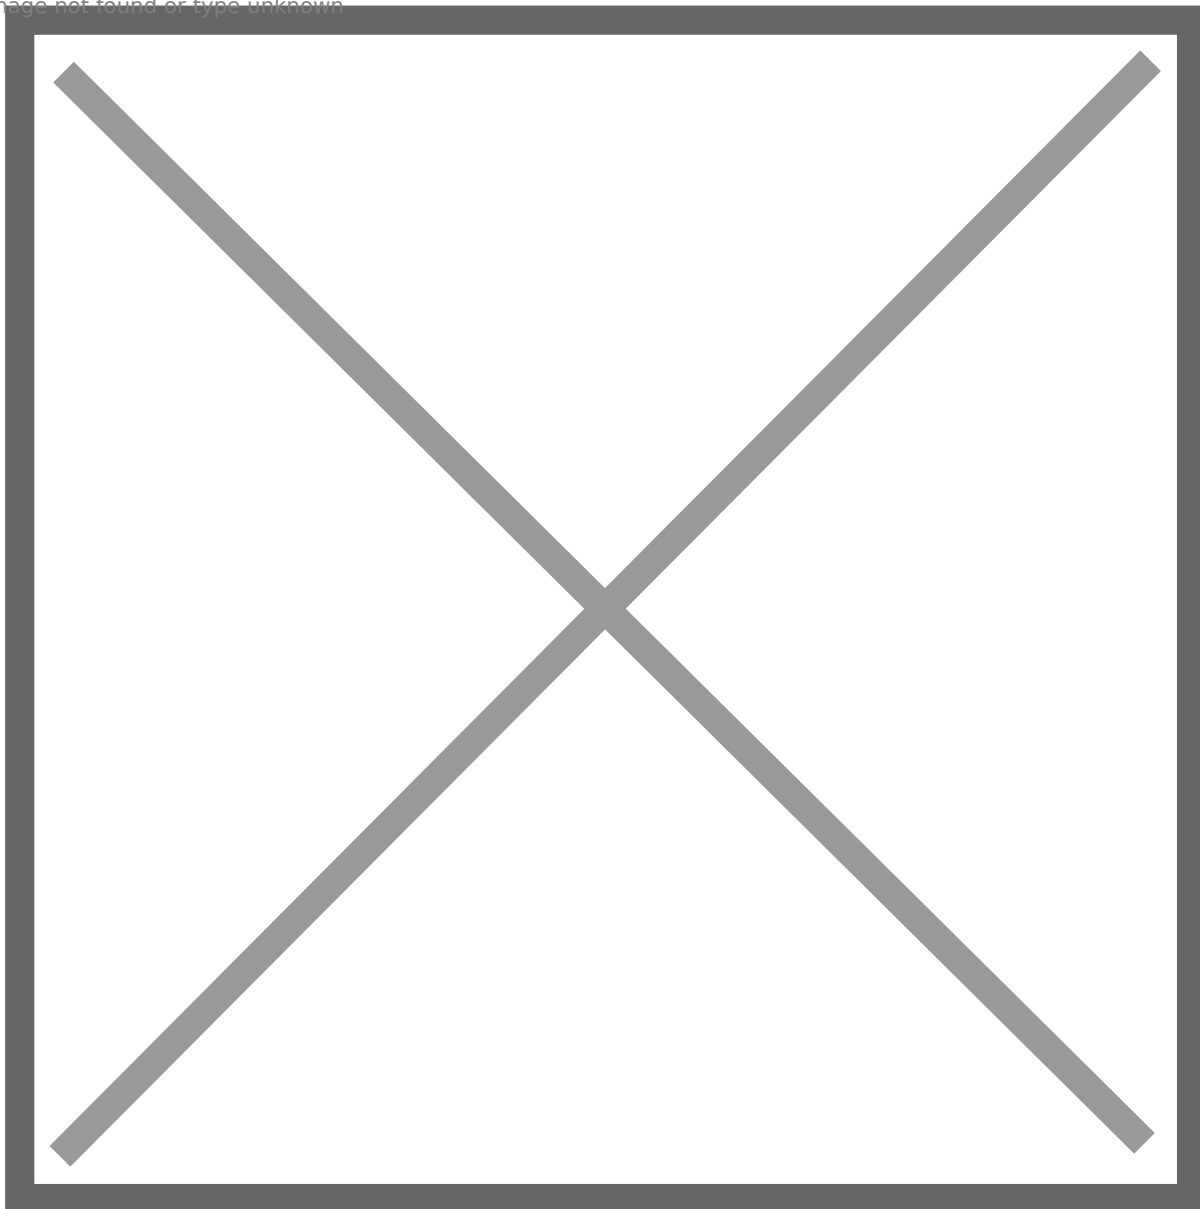


Image not found or type unknown



(Please stop trying “?chopper=whoami”, the payload is not this one, and you cannot see the output.)

I am not sure if the backdoor is used by the hacker for remote management, or other hackers already compromised this server and left this backdoor lol

Though he is a threat actor, we still should not attempt to exploit it.

Finally, let's use Shodan to analyze this server:



Image not found or type unknown



It opens multiple ports, and he did not enforce authentication for Redis. Some people already noticed this unauthenticated Redis server and connected to it.

Image not found or type unknown

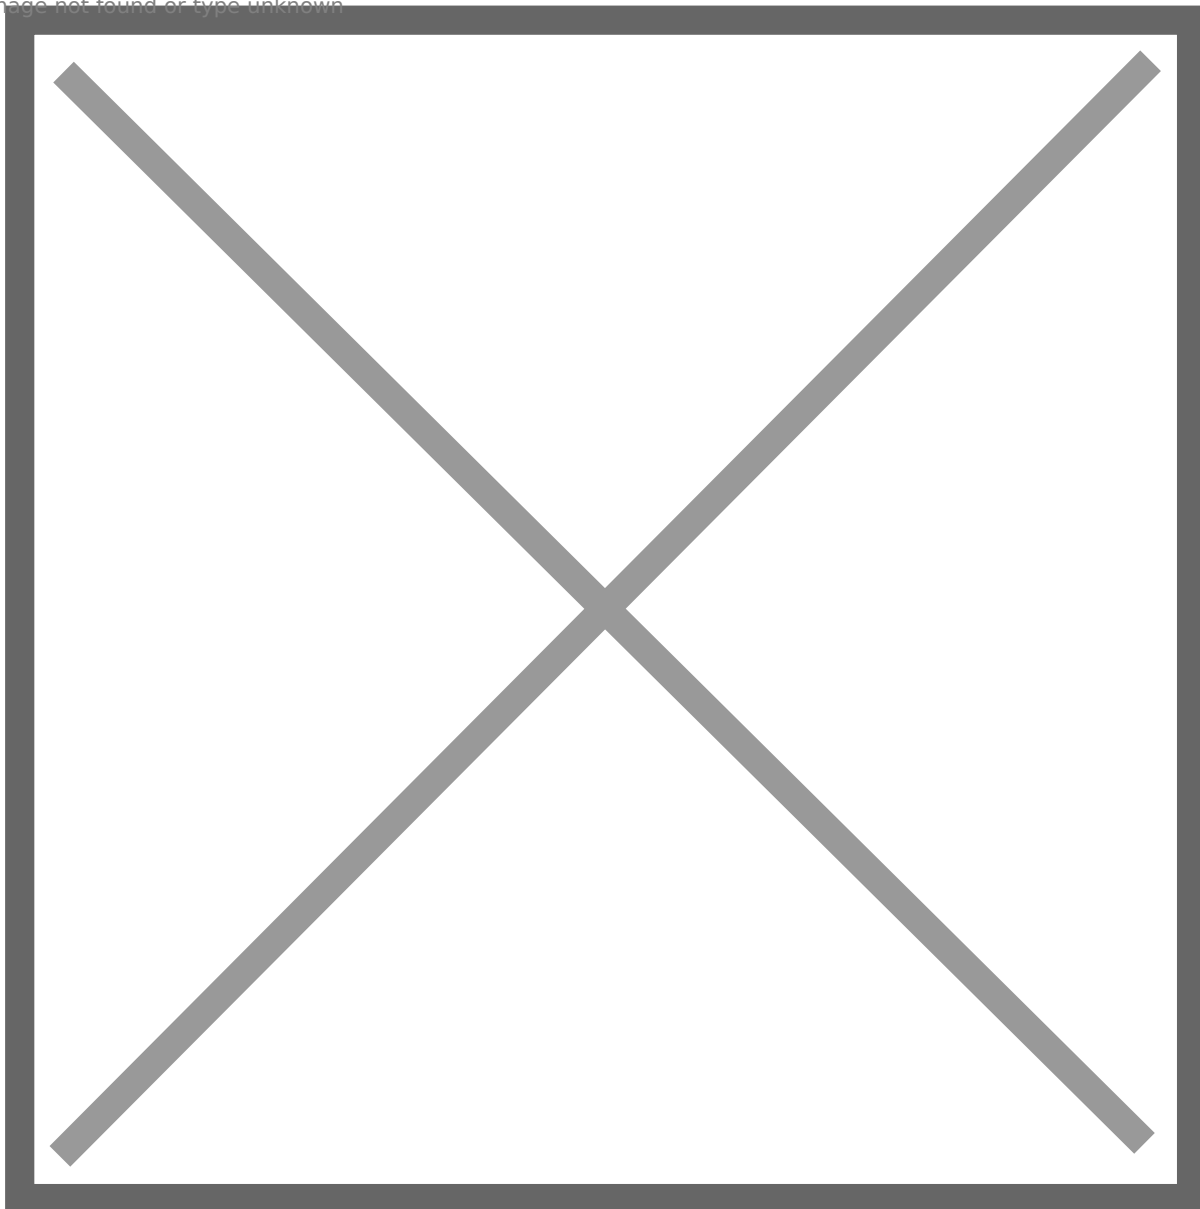


Image not found or type unknown



## Summary

Thank you for reading my article, and I'd like to express my gratitude to the threat hunters who have inspired me. Threat intelligence is a fascinating field that has greatly aided in enhancing my red team skills. Together, let's work towards exposing threat actors and countering them within the bounds of authorization (Directly attacking these servers is not legitimate). Happy hunting!

## References

<https://michaelkoczwaro.medium.com/adversaries-infrastructure-ransomware-groups-apt-and-red-teams-7a6dd761c50e>

<https://michaelkoczwaro.medium.com/hunting-c2-with-shodan-223ca250d06f>

<https://bank-security.medium.com/hunting-cobalt-strike-servers-385c5bedda7b>

<https://quake.360.net/quake/>

[https://twitter.com/MichalKoczwaro?source=post\\_page-----74be52976e9f-----](https://twitter.com/MichalKoczwaro?source=post_page-----74be52976e9f-----)

[https://twitter.com/1ZRR4H/status/1631466978132074498?ref\\_src=twsrc%5Etfw%7Ctwcamp%5Etweetembed%7Ctwterm%5E1631466978132074498%7Ctwgr%5E7a3a86883a64953451d0aa545b0d6d0a18594740%7Ctwcon%5Es1\\_&ref\\_url=https%3A%2F%2Fcdn.embedly.com%2Fwidgets%2Fmedia.html%3Ftype%3Dtext%2Fhtmlkey%3Da19fcc184b9711e1b4764040d3dc5c07schema%3Dtwitterurl%3Dhttps3A%2F%2Ftwitter.com%2F1ZRR4H%2Fstatus%2F1631466978132074498image%3Dhttps3A%2F%2Fi.embed.ly%2F1%2Fimage3Furl3Dhttps253A252F252Fabs.twimg.com252Ferrors252Flogo46x38.png26key3Da19fcc184b9711e1b4764040d3dc5c07](https://twitter.com/1ZRR4H/status/1631466978132074498?ref_src=twsrc%5Etfw%7Ctwcamp%5Etweetembed%7Ctwterm%5E1631466978132074498%7Ctwgr%5E7a3a86883a64953451d0aa545b0d6d0a18594740%7Ctwcon%5Es1_&ref_url=https%3A%2F%2Fcdn.embedly.com%2Fwidgets%2Fmedia.html%3Ftype%3Dtext%2Fhtmlkey%3Da19fcc184b9711e1b4764040d3dc5c07schema%3Dtwitterurl%3Dhttps3A%2F%2Ftwitter.com%2F1ZRR4H%2Fstatus%2F1631466978132074498image%3Dhttps3A%2F%2Fi.embed.ly%2F1%2Fimage3Furl3Dhttps253A252F252Fabs.twimg.com252Ferrors252Flogo46x38.png26key3Da19fcc184b9711e1b4764040d3dc5c07)